




FTP-14A

BIAS TAP

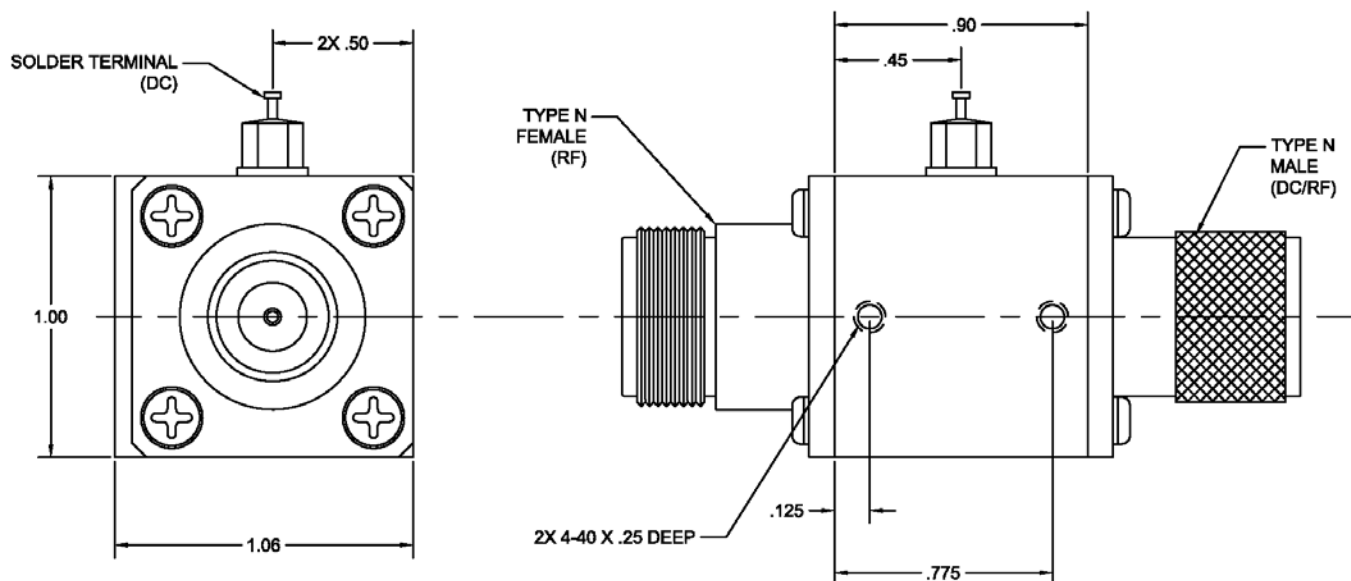

The FTP-14A BIAS TAP is used to provide a DC path to one side of a 50 Ohm transmission line. An integral blocking capacitor isolates the DC from the other side of the line.

ELECTRICAL SPECIFICATIONS

Frequency Range	50-512 MHz
Insertion Loss	0.2 dB max.
VSWR	1.3:1 max.
Impedance	50 Ω nom.
DC Resistance	1.0 Ω max.
Voltage	200 VDC max.
Current	700 mA max.

GENERAL CHARACTERISTICS

Size, excluding connectors	.90" L x 1.00" W x 1.06" H
Connectors	TYPE N (Female)
RF	Type N (Male)
DC/RF	Solder Terminal
DC	3.5 ozs. nom.
Weight	

OPTION: FTP-14AR – Provides DC path to the "N" female connector

REV: 10/17/16