



DFP-102XN

DIPLEXER



DESCRIPTION

Antenna Diplexer for UHF SATCOM/DAMA system operation. Provides input and output ports for an external low noise amplifier.


FEATURES

Excellent performance in a rugged, ultra-compact form factor. Allows simultaneous operation of a transmitter within 290-400 MHz, along with a receiver within 240-270 MHz.

MPI METROPOLE PRODUCTS, INC
[THE FREQUENCY OF INNOVATION]

P: 540.659.2132 F: 540.659.2133
sales@metropoleproducts.com
2040 Jefferson Davis Highway, Stafford, Virginia 22554

www.MetropoleProducts.com

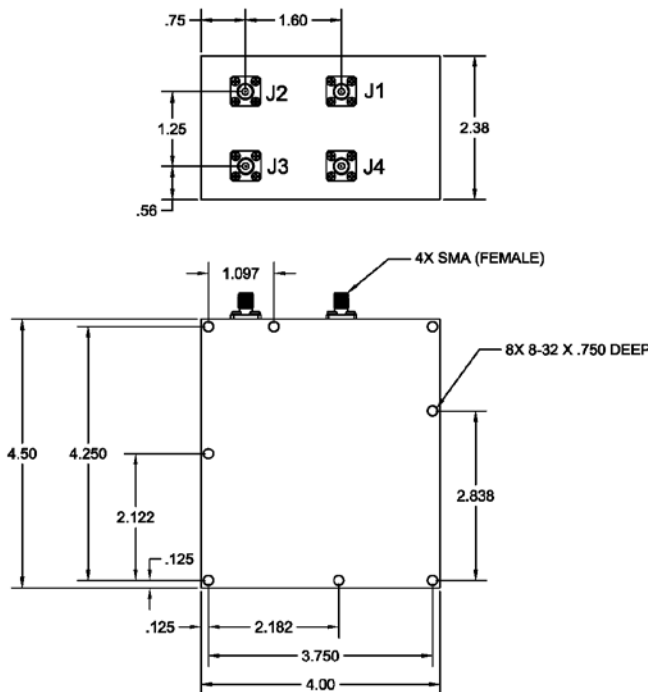

ELECTRICAL SPECIFICATIONS

RECEIVE CHARACTERISTICS, J1-J2 or J3-J4

Passband	240-270 MHz
Insertion Loss	1.3 dB max.
VSWR	1.5:1 max.
Rejection	
290-400MHz	80 dB min.
J1-J2, 2-30 MHz	80 dB min.
J1-J2, 900-1500 MHz	20 dB min.
J3-J4, 900-1500 MHz	15 dB min.
Isolation, J2-J3, 270-290 MHz	45 dB min.

TRANSMIT CHARACTERISTICS, J1-J4

Passband	290-400 MHz
Insertion Loss	
290-292.5 MHz	0.9 dB max.
292.5-400 MHz	0.7 dB max.
VSWR	1.5:1 max.
Rejection	
240-270 MHz	70 dB min.
2-240 MHz	50 dB min.

GENERAL CHARACTERISTICS

Environment	Shipboard
Weight	33 oz.
Connectors	SMA (Female)
Size, excluding connectors	4.50 x 4.00" x 2.38"

REV: 8/25/16