




FBS-255P

BANDPASS FILTER

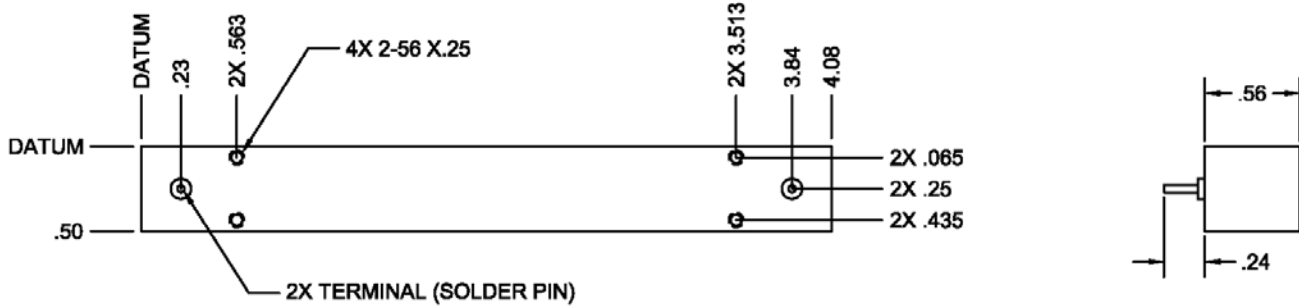

END MOUNTED SMA (FEMALE) AVAILABLE

ELECTRICAL SPECIFICATIONS

Passband	243-270 MHz
Insertion Loss	1.0 dB max.
VSWR	1.5:1 max.
Rejection	
0-180 MHz	40 dB min.
292-318 MHz	23 dB min.
318-340 MHz	40 dB min.
340-2500 MHz	50 dB min.

GENERAL CHARACTERISTICS

Size, excluding connectors	4.08" x .50" x .56"
Connectors	
Standard Configuration	Solder pins
Optional Configuration (End Mounted)	SMA (Female)

REV: 2/3/17