FBV-181

BANDPASS FILTER

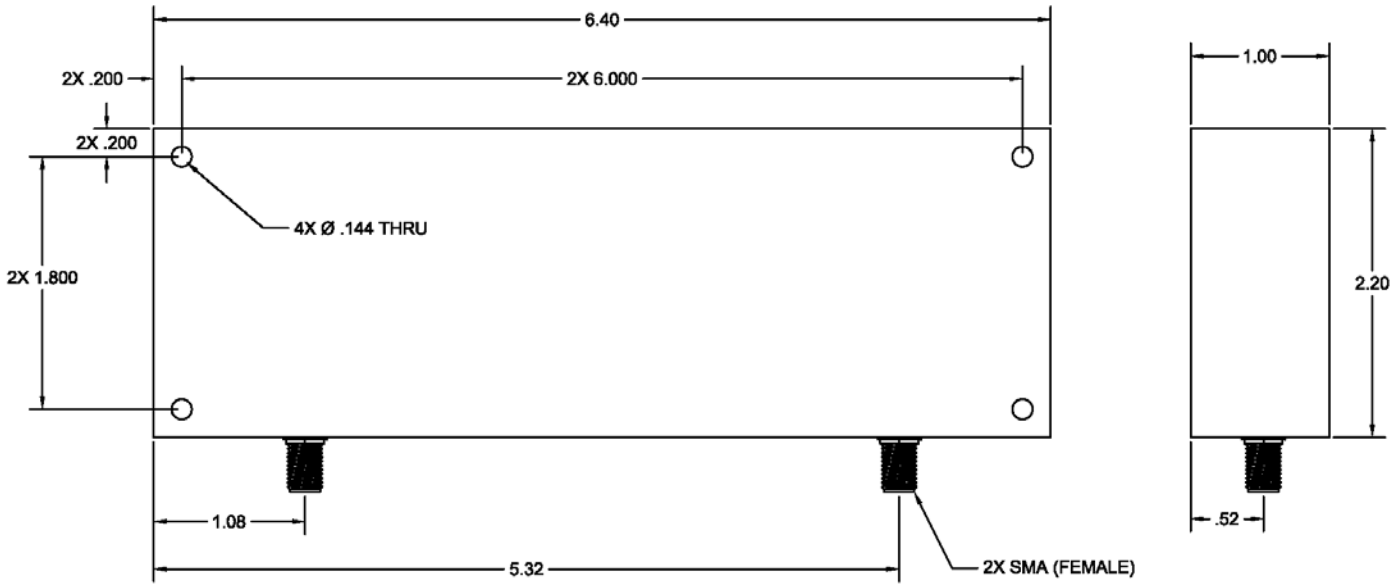

ELECTRICAL SPECIFICATIONS

Frequency	1480-1600 MHz
Insertion Loss	0.7 dB max.
VSWR	1.5:1 max.
Rejection	
1400 MHz	50 dB min.
1680 MHz	50 dB min.

GENERAL CHARACTERISTICS

Size, excluding connectors	6.40” x 2.20” x 1.00”
Temperature	-20°C to +65°C
Altitude	≤200,000 ft.
Vibration, 10-20,000 Hz	$0.1g^2/Hz$
Acceleration	100g
Shock	200g, 1 ms

REV: 9/22/16

MPI METROPOLE PRODUCTS, INC
[THE FREQUENCY OF INNOVATION]

P: 540.659.2132 **F:** 540.659.2133
sales@metropoleproducts.com
2040 Jefferson Davis Highway, Stafford, Virginia 22554

www.MetropoleProducts.com