




# FBV-264T

# BANDPASS FILTER TDRSS TRANSMIT FREQUENCY

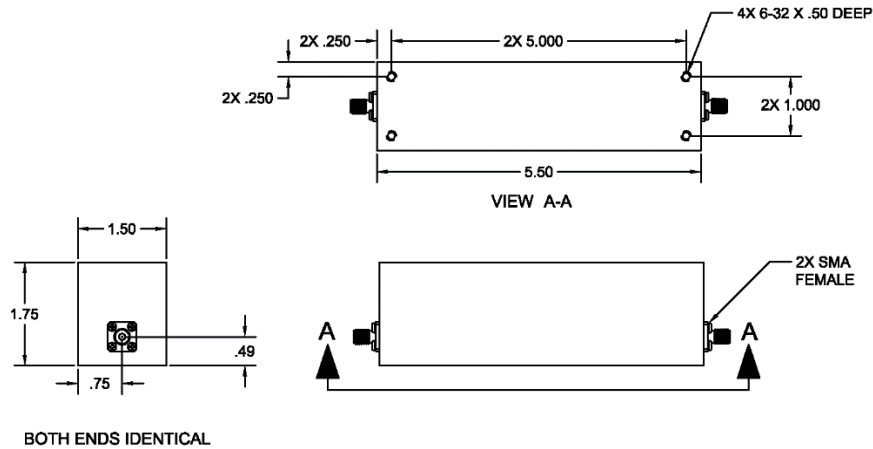

## ELECTRICAL SPECIFICATIONS

Frequency	2287.5 MHz
Bandwidth	±10 MHz
Loss	0.6 dB max.
VSWR	1.35:1 max.
Rejection	
0-2117 MHz	70 dB min.
2117-2236 MHz	30 dB min.
2400-6000 MHz	50 dB min.
Power	
outside critical pressure range	30 W-CW
through critical pressure	10 W-CW

## GENERAL CHARACTERISTICS

Altitude, vented	Unlimited
Temperature	-50° C to +75° C
Vibration	20 Hz to 2000 Hz
Size, excluding connectors	5.50" x 1.50" x 1.75"
Weight	15 oz. nom.
Connectors	SMA (female)

REV: 9/27/16