




PS-101B
HIGH EFFICIENCY

AC-DC POWER SUPPLY
OPTIMUM FOR AM-212 SERIES LNA

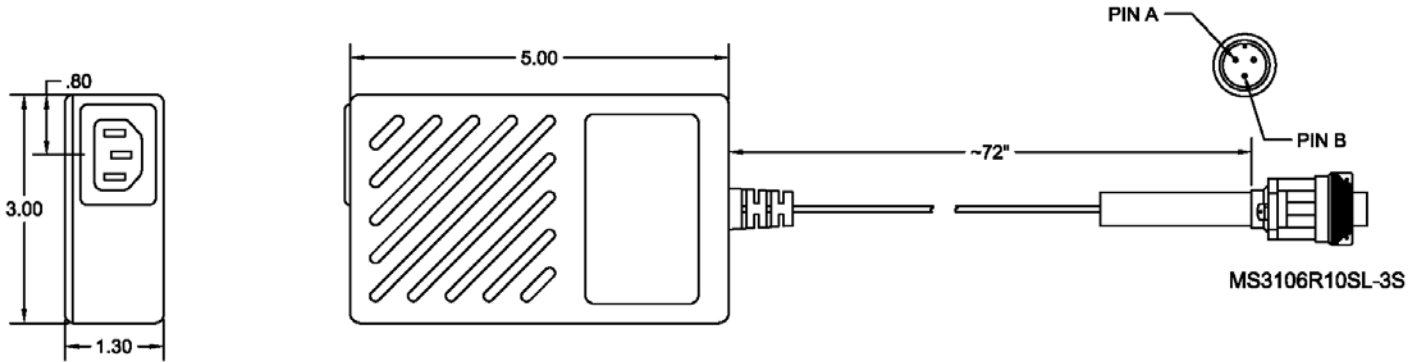

ELECTRICAL SPECIFICATIONS

INPUT

Voltage	110 to 240 VAC
Frequency	50-60 Hz
Connector	3 pin IEC 320, 6 ft. Power Cord

OUTPUT

Voltage	+24 VDC
Current	1.5 A max.
Ripple and Noise	±0.5% V p-p
Line Regulation	.2 % max.
Short Circuit Protection	Yes
Efficiency	88% nom.
Hold-up Time	>16ms@1.5 A, 115 VAC
Connector	MS3106R10SL-3S

ENVIRONMENTAL

Operating Temperature	0°C to +40°C
Derate to 1.0 A at +60°C	
Storage Temperature	-40°C to +85°C
Relative Humidity, non-condensing	5% to 95%

GENERAL CHARACTERISTICS

Size, excluding cord	5.0" x 3.0" x 1.3"
Weight	< 1 lb.

REV: 10/18/16