




# DC-303

# DIRECTIONAL DETECTOR

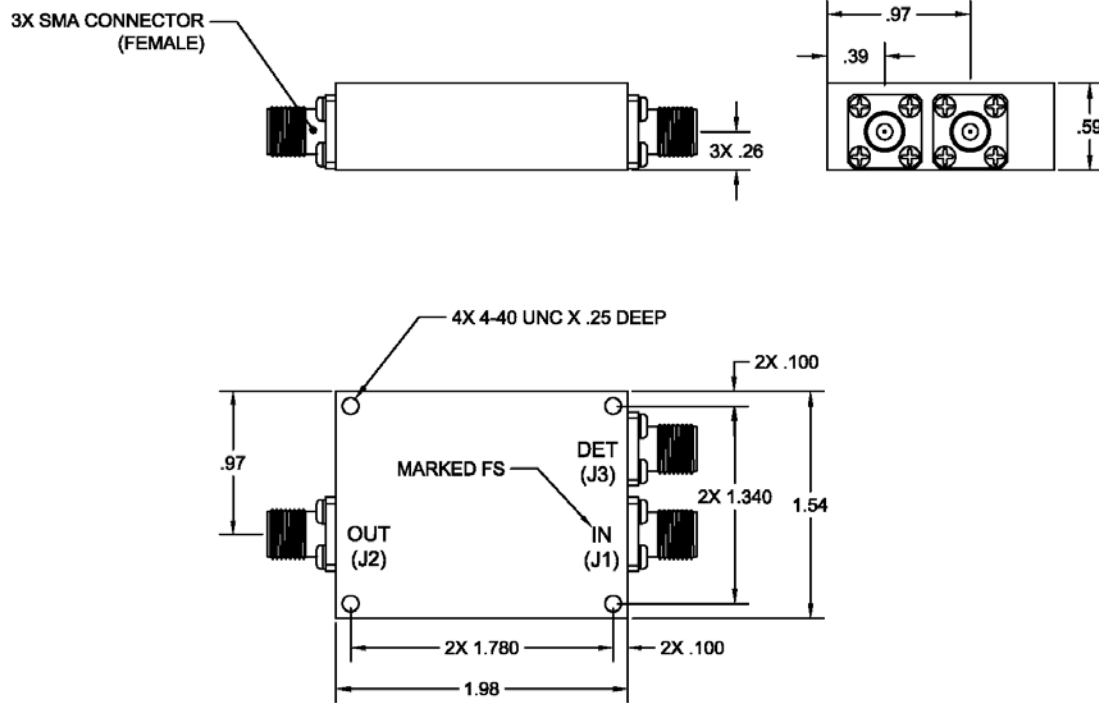


## ELECTRICAL SPECIFICATIONS

Frequency Range	200-400 MHz
Coupling Factor, J1 to J3, + 10 dBm input	8-50 mV nom.
Insertion Loss, J1 to J2	0.1dB max.
Directivity, J2 to J3	0.8-5 mV nom.
VSWR, J1 or J2	1.2:1 max.
Operating Power	100 W max.

## GENERAL CHARACTERISTICS

Connectors	SMA (Female)
Weight	10 oz. nom.
Size, excluding connectors	1.98" x 1.54" x .59"

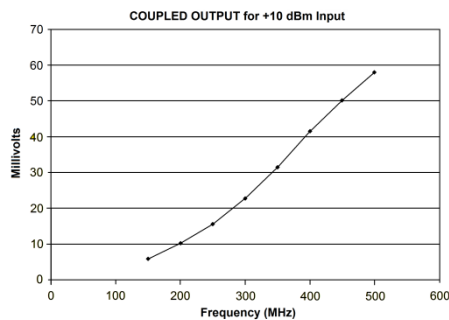

REV: 4/29/16