




FBF-1615

BANDPASS FILTER

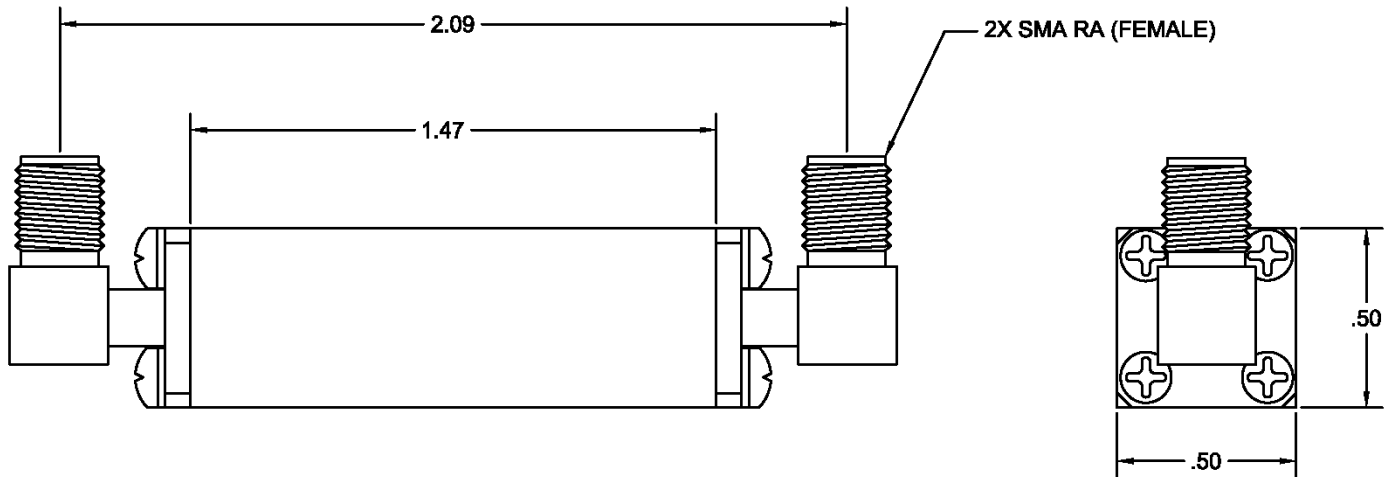

ELECTRICAL SPECIFICATIONS

Frequency	1616 MHz
Insertion Loss*	2.0 dB max.
VSWR	1.5:1 max.
1 dB Bandwidth (1606-1626 MHz)	20 MHz min.
Stopband*	
0-1290 MHz	60 dB min.
1850-8250 MHz	60 dB min.
Rejection*	
1460 MHz	40 dB min.
1685 MHz	25 dB min.

* Tolerance on Loss measurements

≤ 5 dB, ±0.05 dB

≥ 20 dB, ±2.0 dB

GENERAL CHARACTERISTICS

Finish	Chemical Film, Class 3
Weight	28 grams max.
Size, excluding connectors	1.47" x 0.50" x 0.50"
Connectors	SMA, Right Angle (Female)

REV: 6/23/17