




PS-101B
HIGH EFFICIENCY

AC-DC POWER SUPPLY
OPTIMUM FOR AM-212 SERIES LNA

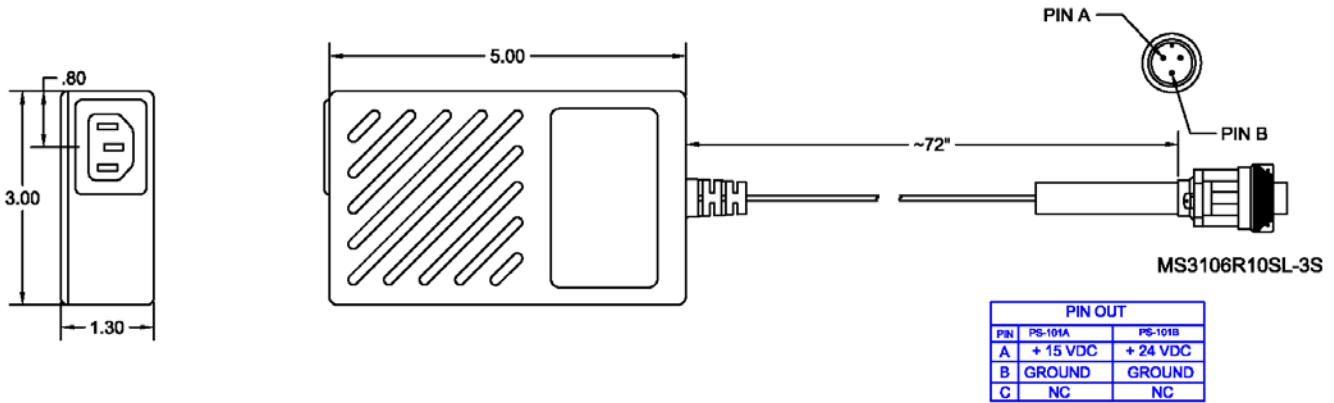

ELECTRICAL SPECIFICATIONS

INPUT

Voltage 110 to 240 VAC
 Frequency 50-60 Hz
 Connector 3 pin IEC 320, 6 ft. Power Cord

OUTPUT

Voltage +24 VDC
 Current 1.5 A max.
 Ripple and Noise ±0.5% V p-p
 Line Regulation .2 % max.
 Short Circuit Protection Yes
 Efficiency 88% nom.
 Hold-up Time >16ms@ 1.5 A, 115 VAC
 Connector MS3106R10SL-3S

ENVIRONMENTAL

Operating Temperature 0°C to +40°C
 Derate to 1.0 A at +60°C
 Storage Temperature -40°C to +85°C
 Relative Humidity, non-condensing 5% to 95%

GENERAL CHARACTERISTICS

Size, excluding cord 5.0" x 3.0" x 1.3"
 Weight < 1 lb.

REV: 11/6/17