




FBA-450M BANDPASS FILTER

HIGHBAND VHF HIGH SELECTIVITY

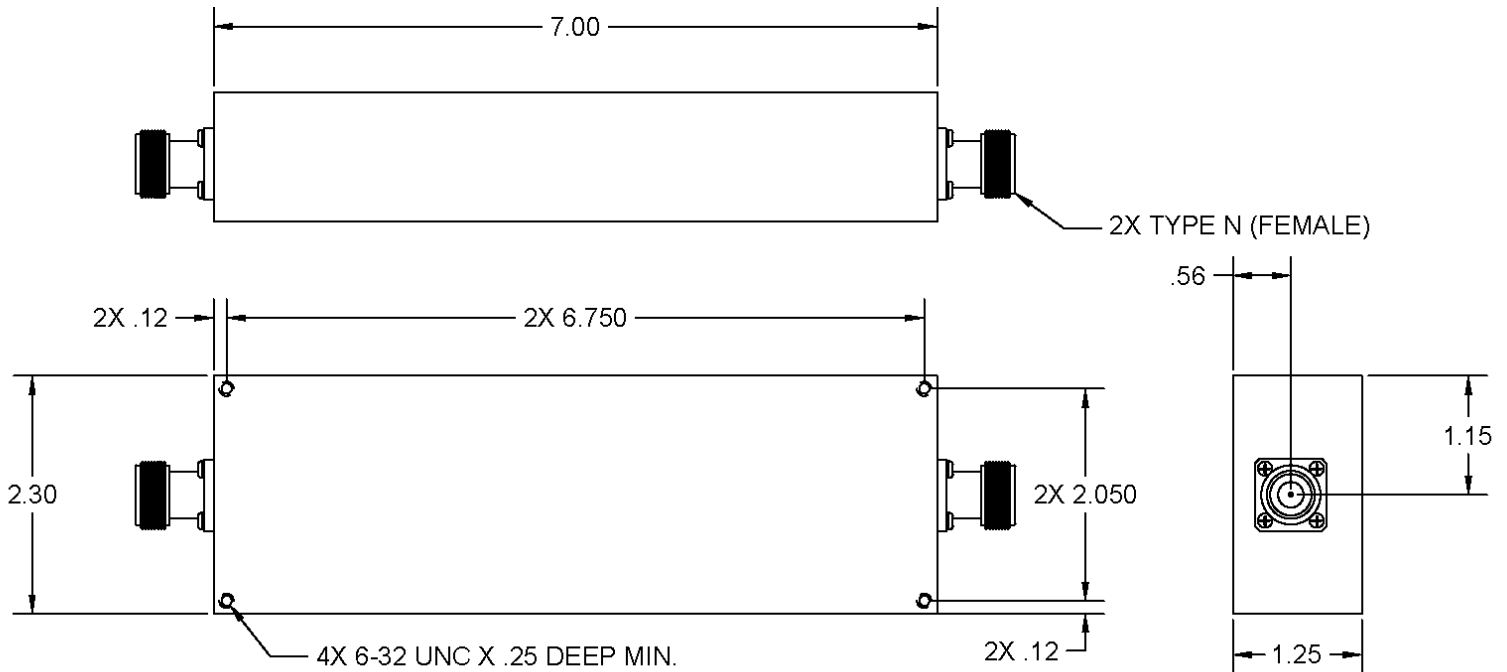

ELECTRICAL SPECIFICATIONS

Insertion Loss, 141 MHz (f_o)	0.8 dB max.
Passband Loss, 108-174 MHz (ref. f_o)	1.0 dB max.
VSWR, 108-174 MHz (ref. 50 Ohms)	1.5:1 max.
Selectivity, 97 and 198 MHz	50 dB min.
RF Power Handling, 108-174 MHz	30 W, CW max.

GENERAL CHARACTERISTICS

Size, excluding connectors	7.00" x 2.30" x 1.25"
Weight	14 oz. nominal
Connectors	Type N (Female)

REV: 5/20/2024