




PS-101B
HIGH EFFICIENCY

AC-DC POWER SUPPLY
OPTIMUM FOR AM-212 SERIES LNA

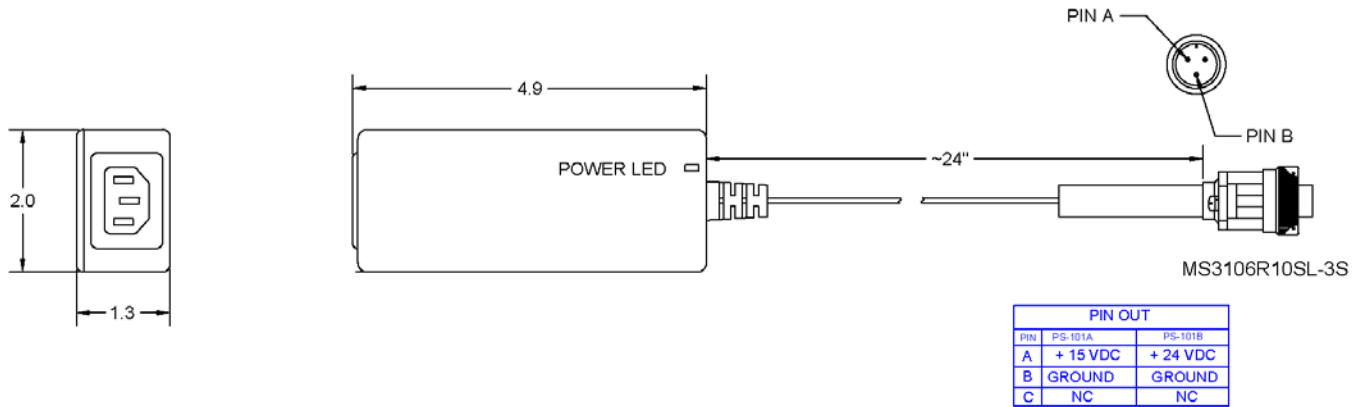

ELECTRICAL SPECIFICATIONS

INPUT

Voltage 80 to 264 VAC
 Frequency 47-63 Hz
 Connector 3 pin IEC 320, 6 ft. Power Cord

OUTPUT

Voltage +24 VDC
 Current 2.5 A max.
 Ripple and Noise ±0.5% V p-p
 Line Regulation ± 1% @ 2.5A max.
 Short Circuit Protection Yes
 Efficiency 88% nom.
 Hold-up Time >16ms@1.5 A, 115 VAC
 Connector MS3106R10SL-3S

ENVIRONMENTAL

Operating Temperature -30°C to +60°C
 Derate to 1.0 A at +60°C
 Storage Temperature -40°C to +85°C
 Relative Humidity, non-condensing 20% to 90%

GENERAL CHARACTERISTICS

Size, excluding cord 5.0" x 2.0" x 1.3" max.
 Weight < 1 lb.

REV: 2/1/2024