




# FBV-160

# BANDPASS FILTER

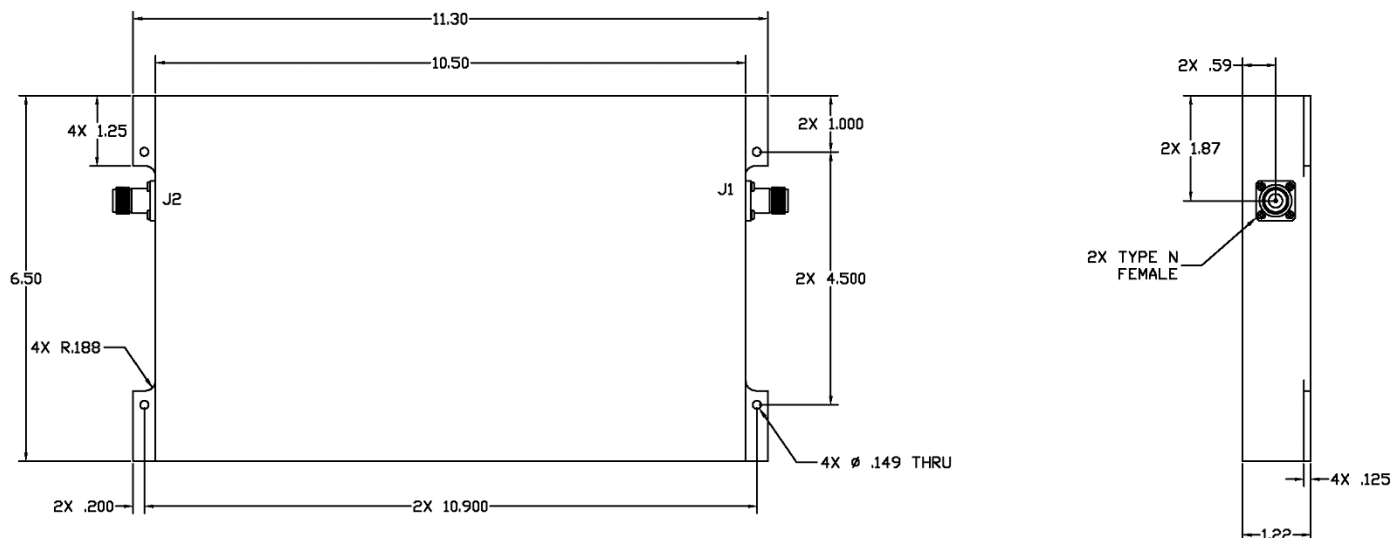

## ELECTRICAL SPECIFICATIONS

Passband	291-318.3 MHz
Insertion Loss	1.0 dB max.
VSWR	1.4:1 max.
Rejection	
0-270 MHz	80 dB min.
340-1000 MHz	90 dB min.
RF Power	400 W CW

## GENERAL CHARACTERISTICS

Size, excluding connectors	11.30" x 6.50" x 1.22"
Weight	60 oz. max.
Connectors	Type N (Female)

REV: 9/22/16